

DN50

2" Bolted Plastic Pumps

Aluminum , PVDF , SS316 Wetted Part Available

Specifications

Flow Rate adjustable..to 570 lpm

Port Size

Inlet and Discharge...2 in ANSI-FLANGE

Air Inlet.....1/2 in (npt)


Suction Lift.....5 m. (dry)

Weight

Prolypropylene.....22 kg.

Kynar.....30.8 kg.

Max...Particla size (Dia)...6 mm

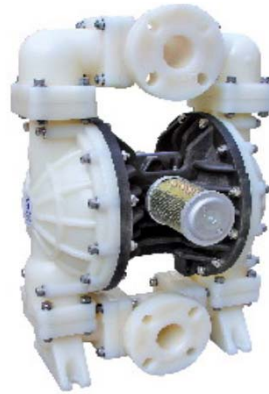


NOTE:For DN50 pumps fitted with Teflon diaphragm,reduce water discharge figures by20% Suction lift is reduced to 10' (3.05m) dry and 20' (6.10m) wet

CAUTION : Do not exceed 100 psig (6.9 bars) air supply liquid pressure.

Performance

Performance curve

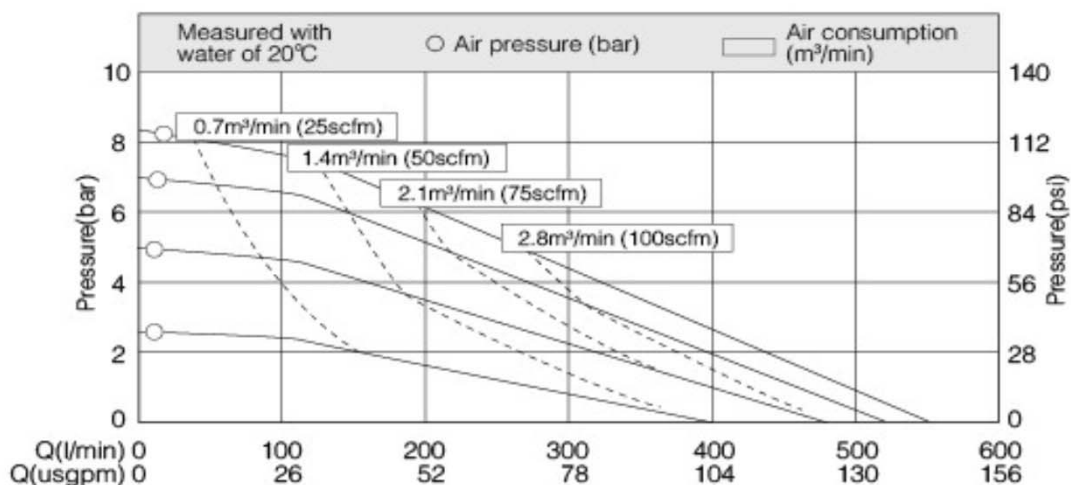

Dimensions

