

DN25

1" Bolted Plastic Pumps

Plastic Pumps , PVDF , Wetted Part Available

Specifications

Flow Rate adjustable..to 157 lpm

Port Size

Inlet and Discharge.....1 in FLANGE

Air Inlet.....1/2 in (BSPT)

Air Exhaust.....3/4 in (BSPT)

Suction Lift.....Dry,Wet 4 m. / 8 m.

Max.Particla size (Dia).....4 mm.

Weight

Prolypropylene.....9 kg.

Kynar.....12 kg.




NOTE:For DN25 pumps fitted with Teflon diaphragm,reduce water discharge figures by20% Suction lift is reduced to 10' (3.05m) dry and 20' (6.10m) wet

CAUTION : Do not exceed 100 psig (6.9 bars) air supply liquid pressure.

Performance

Performance curve

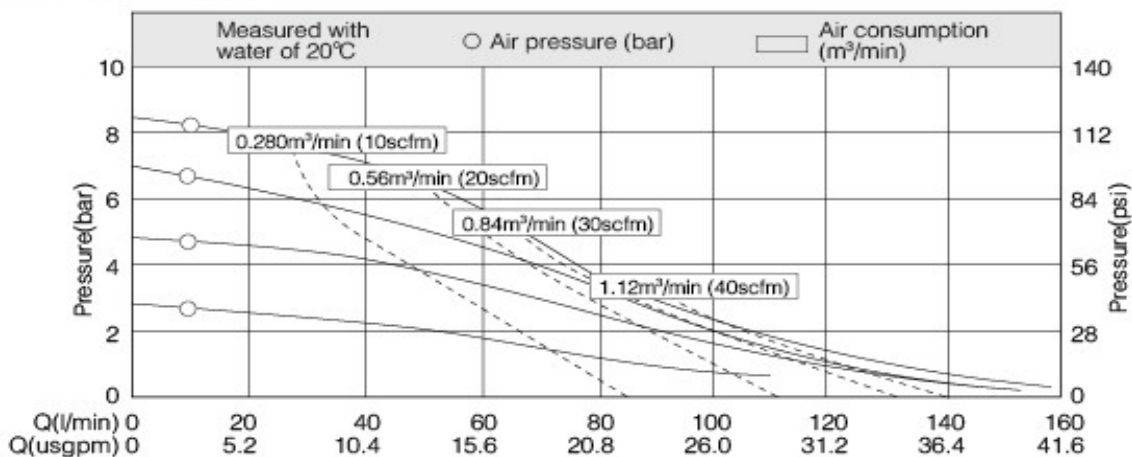

Dimensions

Installation size

